



Republic of the Philippines
VISAYAS STATE UNIVERSITY
Visca, Baybay City, Leyte



PURCHASE REQUEST

PPMP No. : **PPMP-2025-070325-1281**

PR No.: **TF-2025-08-00967**

Date: **08-08-2025**

Dept./Office: **FVM**

Category: **Construction
and Electrical Supplies**

Duration: **2024-12-01
to
2026-11-30**

Section/End-User: **Heherson A. Luza**

Project Title/Code: **20201050 -
10.6.33 / 20201050 - 6.10.6.33**

Funding Source: **Trust Fund**

Item #	Item Description	Unit	Qty	Unit Cost	PAR/ICS	Total Cost
1	FVM Central Laboratory Renovation	lot	1	390,000.00	HARVIE P. PORTUGALIZA	390,000.00

Specification:

A. MOBILIZATION/DEMOBILIZATION

Quantity: 1

Unit: Lot

B. Glass Partition and Door

Specs:

- Fixed Glass Partition Wall (5.50 M x 2.20 M), 6mm thk Glass;

Aluminum Frame (50 mm x 75 mm), Grey Powder Coated Finish

Quantity: 12

Unit: sq. m

- Sliding Glass Door (Single Panel) (1.00 M x 2.10 M), 6mm thk Glass;

Aluminum Frame (50 mm x 50 mm), Grey Powder Coated Finish

Quantity: 2.1

Unit: sq. m.

C. Island Working Table:

Specs:

Carpentry:

-

- Marine Plywood, 3/4"
 - Qty: 5 sheets
- Assorted Common Wire Nails (1", 1 1/2")
 - Qty: 2 kg
- Wood Glue
 - Qty: 3 ltrs

Painting:

- Wood Putty/Cast
 - Qty: 1 kg
- Wood Primer, Flat Finish
 - Qty: 1 gallon
- Enamel Paint, Gloss Finish
 - Qty: 2 gallons
- Paint Thinner
 - Qty: 2 gallons
- Assorted Sanding Pad (#120, #220)
 - Qty: 20 sheets
- Paint Brush 2"
 - Qty: 5 pcs
- Paint Brush 4"
 - Qty: 5 pcs

Hardware:

- Cabinet Handle – Stainless Steel 3"
 - Qty: 4 sets
- Concealed Cabinet Hinges, Full Overlay, Soft Closing
 - Qty: 4 sets
- Drawer Slide – Bearing Type 22", Soft Closing
 - Qty: 10 sets
- Drawer Pull/Handle
 - Qty: 10 sets
- Stainless Tube - 1" Diameter, 2.0 M Length
 - Qty: 2 Lengths

Center Table Electrical Works:

- Convenience Outlet, 2 Gang, 3-Pin Universal
 - Qty: 6 sets
- Electrical Utility Box, 2" x 4"
 - Qty: 10 pcs
- Rigid Plastic Conduit, 3/4" Diameter
 - Qty: 10 sets
- Tubular Light, T5 LED, 8W – Cool White
 - Qty: 4 sets
- Single Gang Switch
 - Qty: 2 sets

D. Side Counter and Shelves:

Specs:

Counter:

- Portland Cement, Type I
 - Qty: 4 pcs
- Fine Sand
 - Qty: 1 cu.m.
- Crushed Gravel, ¾"
- Qty: 1 cu.m.
- Hollow Block, 4" Thk
 - Qty: 8 pcs
- Deformed Reinforcing Bars, 10 mm Diameter, 6M Length, Grade 33
 - Qty: 4 pcs
- Hacksaw Blade
 - Qty: 2 pcs
- Concrete Sealer
 - Qty: 1 gallon

Shelves:

- Marine Plywood, ¾"
 - Qty: 7 sheets
- Assorted Common Wire Nails (1", 1 ½")
 - Qty: 5 kgs
- Wood Glue
 - Qty: 0.5 kg
- Wood Putty/Cast
 - Qty: 1 kg
- Wood Primer, Flat Finish
 - Qty: 1 gallon
- Enamel Paint, Gloss Finish
 - Qty: 1 gallon
- Paint Thinner
 - Qty: 1 gallon
- Assorted Sanding Pad (#120, #220)
 - Qty: 20 sheets
- Paint Brush, 2"
 - Qty: 5 pcs
- Paint Brush, 4"
 - Qty: 5 pcs

Hardwares:

- Stainless Tube, 1" Diameter, 2.5 M Length
 - Qty: 2.0 Lengths
- Concealed Hinges, Full Overlay
 - Qty: 16 pcs

- Concealed Hinges, Half Overlay
 - Qty: 8 pcs
- Cabinet Handle - Stainless Steel 3"
 - Qty: 22 pcs
- Drawer Guide, Heavy Duty, Ball Bearing, Full Extension 18"
 - Qty: 10 sets

E. Safety Shower Assembly

Specs:

Plumbing Works:

Safety Shower with Eye Wash

- Qty: 1 set
- Water Pipe - 1" PPR, PN10
- Qty: 4 Lengths
- Coupling - 1" PPR, PN10
- Qty: 5 pcs
- 90 Elbow - 1" PPR, PN10
- Qty: 3 pcs
- Male Adaptor - 1" PPR, PN10
- Qty: 1 pc
- Floor Drain 4"
- Qty: 1 pc
- PVC P-Trap - 2" Diameter, S1000
- Qty: 1 pc
- PVC Pipe - 2" Diameter, S1000
- Qty: 3 Lengths
-

F. Painting Works:

Wall and Ceiling:

- Latex Paint, Green, Semi-Gloss
- Qty: 10 Gallons
- Assorted Sanding Pad (#120, #220)
- Qty: 50 sheets
- Paint Roller 12"
- Qty: 10 pcs
- Paint Roller Tray (W – 280mm x H – 360mm x D - 75mm)
- Qty: 5 pcs
-

G. Electrical Works

Consumables:

- Wire Connectors
 - Qty: 1 pack
- Electrical Tape
 - Qty: 30 rolls
- Black Screw pointed #1
 - Qty: 50 pcs
- PVC Solvent
 - Qty: 2 cans

Wires:

- Stranded Wire – 2.0 mm2 THHN/THW
 - Qty: 1 box
- Stranded Wire – 3.5 mm2 THHN/THW
 - Qty: 2 boxes
- Stranded Wire – 3.5 mm2 TW (G)
 - Qty: 1 box
- Stranded Wire – 5.5 mm2 THHN/THW
 - Qty: 1 box
- Stranded Wire – 14 mm2 THHN/THW
 - Qty: 60 meters

Lighting Fixture:

- Louver Housing LED lights Flourescent 2x18 watts recessed type 4ft
 - Qty: 8 sets
- Convenience Outlet Single Universal with Ground
 - Qty: 2 pcs
- Convenience Outlet Duplex Universal with Ground and Shutter
 - Qty: 9 pcs
- Weatherproof Outlet 2 Gang Universal with Ground and Shutter
 - Qty: 4 sets
- ACU Outlet
 - Qty: 1 pc
- 3 Gang Switch Luminous
 - Qty: 1 set
- Single Switch Luminous
 - Qty: 1 set
- Emergency Lights Twin Head 3 Watts
 - Qty: 2 sets

Electrical Rough-ins:

- Conduit (PVC) – 20mm. dia.
 - Qty: 60 L
- Conduit (PVC) – 32mm. dia.
 - Qty: 10 L
- Long Sweep Elbow (PVC) – 32mm.
 - Qty: 3 pcs
-

PVC Molding ¾ Square Type White

- Qty: 20 L
- Utility Box
 - Qty: 22 pcs
- Junction Box
 - Qty: 15 pcs
- Square Box 4x4 x2 PVC
 - Qty: 2 pcs

Panel Boards:

- (PB) – Panel Board dead front single phase pure copper busbar 60 amperes I
 - Qty: 1 set


Branches:


1-15AT/5DAF,2P,15KAIC,MCB



4-20AT/5DAF,2P,15KAIC,MCB

2-30AT/5DAF,2P,15KAIC,MCB

Floor Plan:

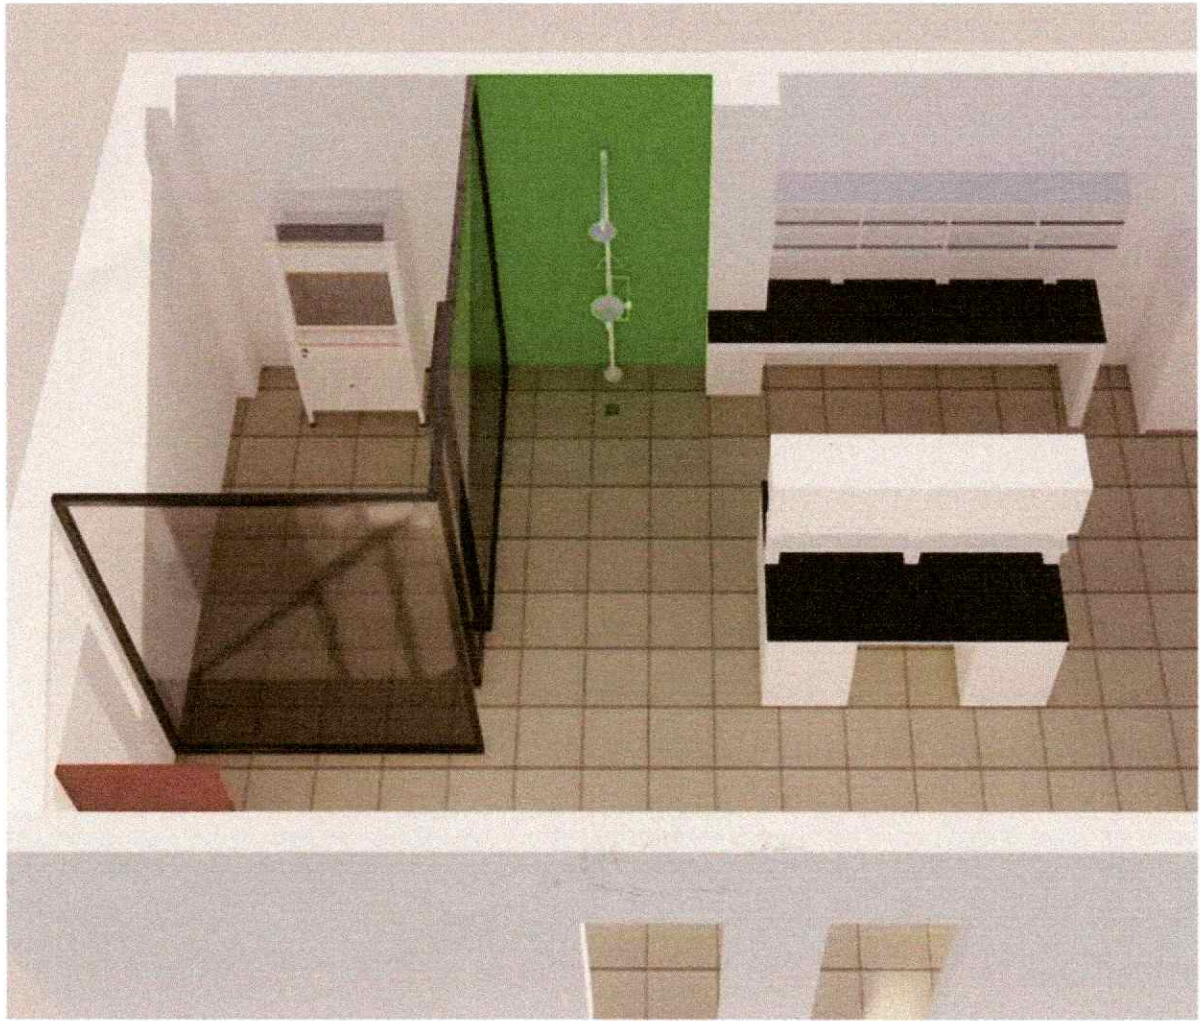

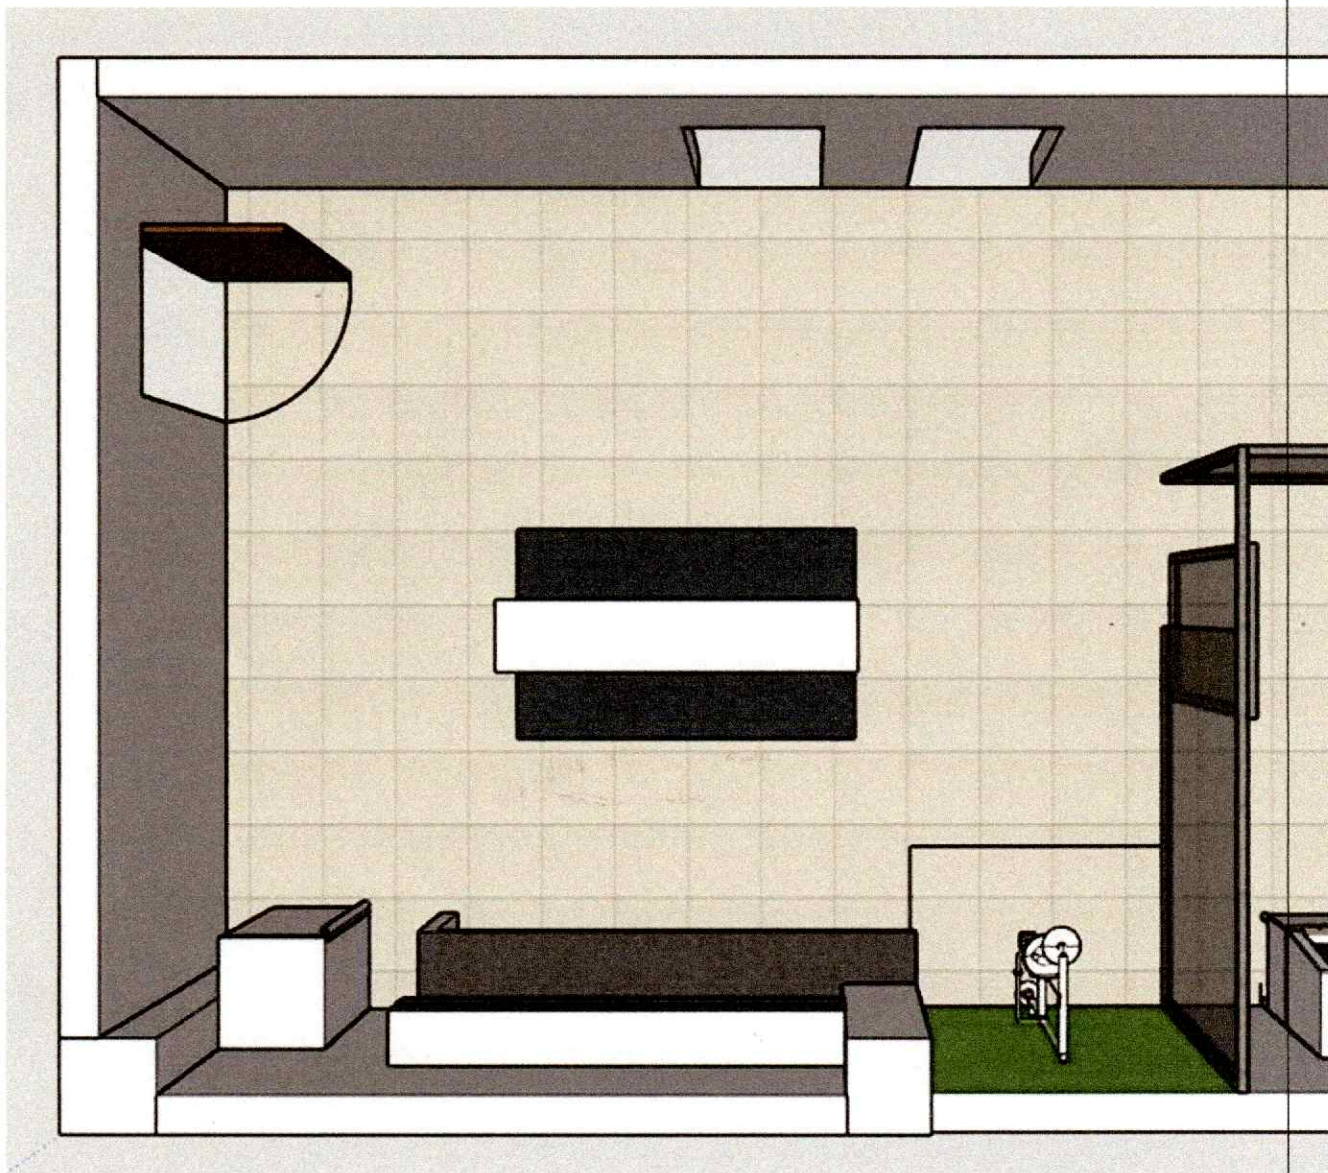

TOTAL				390,000.00			
Purpose: FVM Central Laboratory Renovation							
Checked by:				Funds Available:			
 CLINT C. SARVIDA				 NICK FREDDY R. BELLO			
TWG - Construction and Electrical Supplies				HEAD, ACCOUNTING OFFICE			
Signature:	Prepared by:	Noted by:	Approved by:				
	 HEHERSON A. LUZA	 HARVIE P. PORTUGALIZA	 PROSE IVY G. YEPES				
Designation:	PROJECT TECHNICAL ASSISTANT I	UNIT HEAD, PROJECT LEADER	PRESIDENT, VSU				